

R8 Bass Tone Control, R8A,R8C 1 meg. linear, R8B 500K linear C-BA-813-4000  
 R11 Volume Control, 500K, C2 Audio Taper C-BA-811-3707  
 R16 Treble Control, 50K, C2 Audio Taper C-BA-811-3703

D1,D2 Diodes - 1200 PIV, 250 MA  
 D3 Diode - 200 PIV, 150 MA

D1-57  
 D1-69A

T1 Power Transformer  
 Output Transformer

TF-77P-S  
 TF-472-0

L1 Filter Choke

TF-3021H

S1A,S1B,  
 S1C,S1D Switch, Power, Polarity, standby



SH-78

15" Speaker, 16 ohm, 40 cycle

S-0127

For Parts Call  
 Parts is Parts  
 800-590-0014  
 802-464-0014

email info@guitar-parts.com  
 http://www.ampparts.com

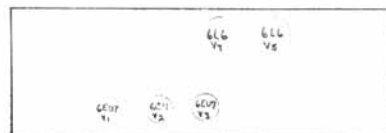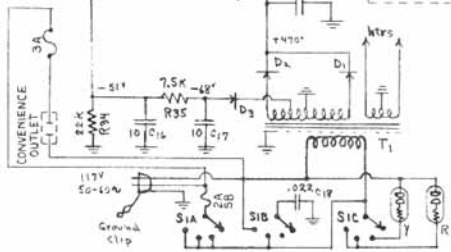

D.C. VOLTAGES TO CHASSIS WITH V.T.V.M.  
 CAPACITORS IN MFD EXCEPT WHERE NOTED.

## FUSE

The fuse used in this Amplifier is a type 3AG of three amperes rating.

DO NOT USE FUSES OF HIGHER RATING

## SERVICE

If the amplifier is in need of servicing, it should be taken to a reliable radio man. The electrical diagram in this folder should be shown the repairman to assist him in servicing the amplifier.